




BRONMETAL

www.bronmetal.com

THREADED / DIE-CAST FLAT BARS

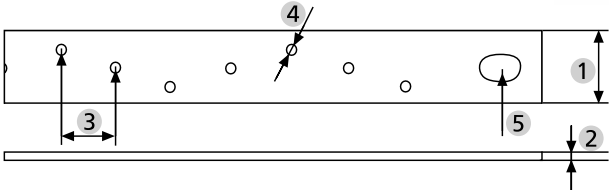

MEASUREMENTS

- 1 x 2 Dimensions
- 3 Distance between holes
- 4 Metric thread
- 5 End hole

Notes : The round / oblong holes are made with a tolerance of -0+0,5 mm
Comercial lengths : 990/1000 / 2000 / 2500 / 3000 / 5000 mm
Other sizes and formats available on request

DRILLED COPPER BUSBAR

(1) x (2)	(3)	(4)	(5)
With oblong hole			
Size	Distance between holes	Metric thread	Oblong hole
15x5	25	M6	8X12
20x5	25	M6	10X14
25x5	25	M6	10X14
30x5	25	M6	12X16
32x5	25	M6	12X16
With metric thread			
Size	Distance between holes	Metric thread	
12x2	18	M5	
12x4	18	M5	
12x5	18	M5	
15x5	25	M6	
18x4	20	M8	
20X5	25	M6	
25x4	20	M6	
30x5	25	M6	
Round hole			
Size	Distance between holes	Metric thread	Round hole
15x5	25	M6	Ø 8
20x5	25	M6	Ø 10
25x5	25	M6	Ø 10
32x5	25	M6	Ø 12
20x10	25	M8	Ø 10
30x10	25	M8	Ø 10

ZIG-ZAG DRILLED COPPER BUSBAR

(1) x (2)	(3)	(4)	(5)
Con oblongo			
Size	Distance between holes	Metric thread	Oblong hole
32X5	17,5	M6	12X16

PUNCHED COPPER BUSBAR

(1) x (2)	(3)	(4)
Troquelada		
Size	Distance between holes	Diameter
25X5	25	10
50X5	25	10
63X5	25	10
80X5	25	10
100X5	25	10
125X5	25	10
50X10	25	10
60X10	25	10
80X10	25	10
100X10	25	10
120X10	25	10